

6. Subaru Select Monitor

A: OPERATION

1. GENERAL DESCRIPTION

For on-board diagnosis function of the EyeSight, use the Subaru Select Monitor.

The on-board diagnosis function operates in three categories, which are used depending on the type of problems.

1) Diagnosis with diagnostic trouble code (DTC):

When the electrical failure occurs in the EyeSight, DTC is detected from the stereo camera. If the DTC is detected, the relevant DTC is displayed by illuminating or blinking the EyeSight warning light. To check the details concerning the DTC, use the Subaru Select Monitor.

2) Diagnosis with cancel code:

(1) This category of diagnosis requires actual driving of the vehicle in order to determine the cause in such a case when the set speed is cancelled during cruise control driving although cruise cancel condition is not entered.

(2) With ECM cancel code and stereo camera ACC cancel code, cancel condition (Code No.) is stored when detected during cruise control driving.

CAUTION:

- **With ECM cancel code, not only the cruise control “cancel” occurred (although the driver does not input the “cancel” operation), but also the “cancel” condition input by the driver is stored.**
- **The latest memory contents of the ECM cancel code (latest code) is cleared when the ignition switch is turned to OFF. However, memory contents created by the diagnosis of switches related to system and cruise control will be kept as the trouble history (memory code) after turning the ignition switch to OFF.**

3) Real-time diagnosis:

Real-time diagnosis function is used to determine whether or not the input signal system is in good order, according to signal emitted from switches, sensors, etc.

(1) Vehicle cannot be driven at cruise speed when the problem occurs in the cruise control system or relevant circuits.

(2) Monitor the signal conditions from switches and sensors.

2. BASIC OPERATION

For operation procedures, refer to the “PC application help for Subaru Select Monitor”.

B: INSPECTION

1. COMMUNICATION FOR INITIALIZING IMPOSSIBLE

- Communication error with stereo camera

DETECTING CONDITION:


- Defective harness connector
- Power supply circuit malfunction
- Defective stereo camera
- Defective CAN system
- Defective Subaru Select Monitor

TROUBLE SYMPTOM:

- EyeSight warning light blinks.

WIRING DIAGRAM:

EyeSight System <Ref. to WI(w/o HEV)-126, WIRING DIAGRAM, EyeSight System.>

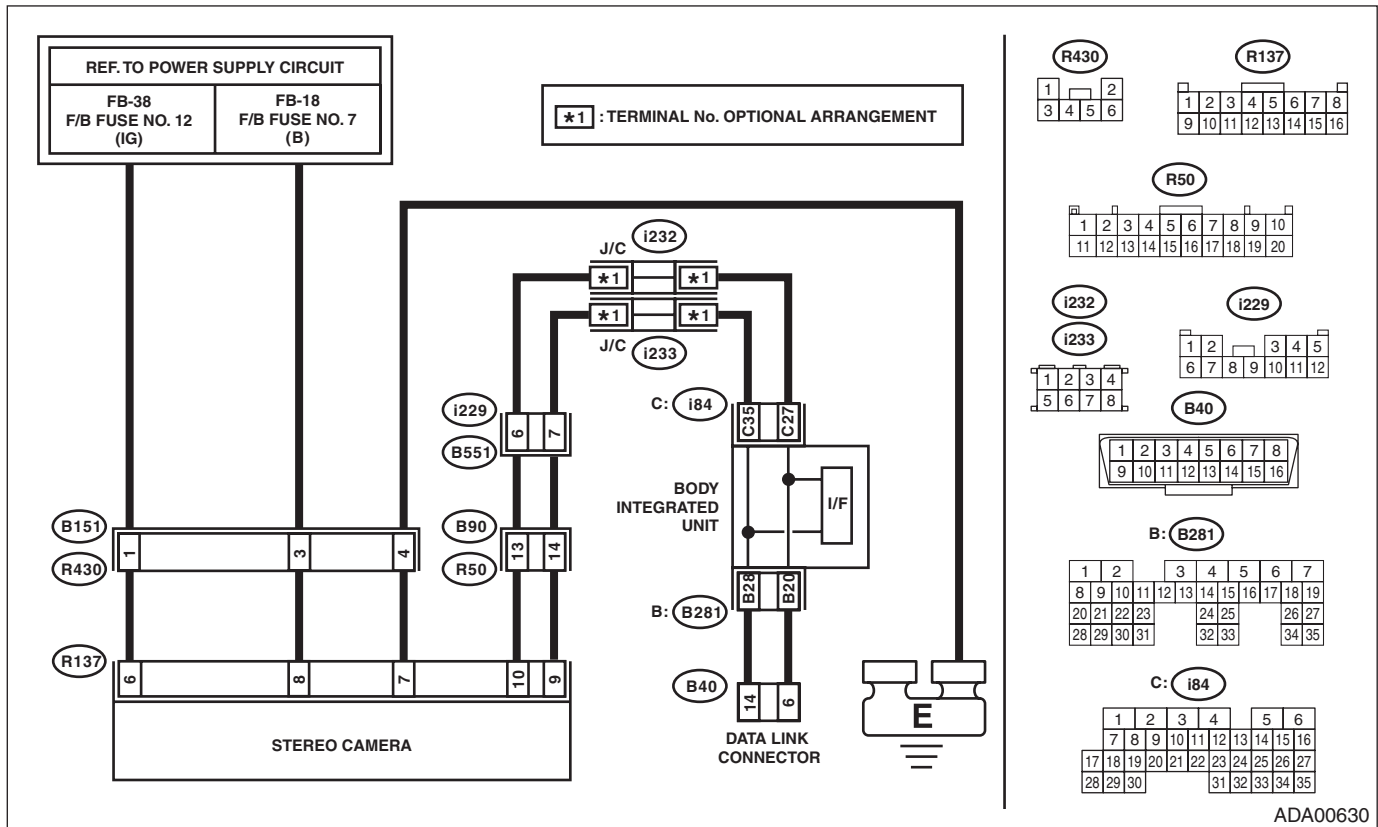

Step	Check	Yes	No
1	CHECK IGNITION SWITCH.	Go to step 2.	Turn the ignition switch to ON, and select «ADA adaptive cruise control system» using the Subaru Select Monitor.
2	CHECK BATTERY. 1) Turn the ignition switch to OFF. 2) Measure the battery voltage.	Go to step 3.	Charge or replace the battery.
3	CHECK BATTERY TERMINAL.	Go to step 4.	Connect the battery terminal securely or replace it.

Subaru Select Monitor

EyeSight (DIAGNOSTICS)

Step	Check	Yes	No
4 CHECK SUBARU SELECT MONITOR COMMUNICATION. 1) Turn the ignition switch to ON. 2) Using the Subaru Select Monitor, check whether the communication can be executed normally.	Is the communication between Subaru Select Monitor and body integrated unit normal?	Go to step 5.	Check the connection of the Subaru Select Monitor, and perform communication with the body integrated unit again.
5 READ DTC OF BODY INTEGRATED UNIT. Select «Integ. unit mode», and check DTC.	Is any DTC other than “Lost Communication With EyeSight” detected?	Perform the diagnosis according to DTC.	Go to step 6.
6 CHECK HARNESS CONNECTOR BETWEEN STEREO CAMERA AND DATA LINK CONNECTOR. 1) Turn the ignition switch to OFF. 2) Disconnect the stereo camera connector. 3) Measure the resistance between the stereo camera and the data link connector. Connector & terminal (R137) No. 10 — (B40) No. 6: (R137) No. 9 — (B40) No. 14:	Is the resistance less than 10 Ω?	Go to step 7.	Repair or replace the harness and connectors between the stereo camera and data link connector.
7 CHECK POWER SUPPLY CIRCUIT. 1) Turn the ignition switch to ON. 2) Measure the voltage between stereo camera and chassis ground. Connector & terminal (R137) No. 6 (+) — Chassis ground (-): (R137) No. 8 (+) — Chassis ground (-):	Is the voltage 10 V or more?	Go to step 8.	Repair or replace the harness and connectors between the stereo camera and fuse.
8 CHECK GROUND CIRCUIT. 1) Turn the ignition switch to OFF, then disconnect the ground cable from battery. 2) Measure the resistance between harness connector of stereo camera and chassis ground. Connector & terminal (R137) No. 7 — Chassis ground:	Is the resistance less than 10 Ω?	Go to step 9.	Check the harness from stereo camera to chassis ground.
9 CHECK CONNECTOR.	Is there poor contact of stereo camera connector?	Repair the connector, or replace harness.	Replace the stereo camera. <Ref. to ES-7, REMOVAL, Stereo Camera.>